

18W UI39/13.5 FAUI3913 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.375kg
 Packaging unit: 10 pieces (tray)
 Fixing material for 2.5mm (0.098 inch)
 Self-tapping screws: DIN 7513 (M 3x8)
 Sheet-metal screws: DIN 7971 (2.9x6.5)


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS



ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI391349	2*115	2*6/1500	2*7.7
FAUI391350	2*115	2*9/1000	2*11.3
FAUI391351	2*115	2*12/750	2*15.3
FAUI391352	2*115	2*15/600	2*19.4
FAUI391353	2*115	2*18/500	2*22.5
FAUI391354	2*115	2*24/375	2*30.6

TECHNICAL INFORMATION

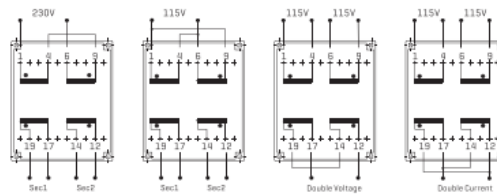

ALL DIMENSIONS IN MM