

ASP07 Series 7Watt

FEATURES:

- ✓ Small size, high power density
- ✓ Wide input voltage range: 85~265Vac or 120~370Vdc
- ✓ Wide output voltage range: 3.3~24VDC
- ✓ Low on-load power consumption <0.15W
- ✓ Better Energetic Efficiency: Meet Requirements of Energy Star and EC Code of Conduct
- ✓ Encapsulated Design and Same Footprint as EI38 Transformer
- ✓ Protections: Short Circuit, Over Temperature, Over Current



MODEL LIST

Model number	Nominal input voltage	Output voltage	Output power	Maximum output current	efficiency	Maximum ambient temperature	authentication
ASP07200	85-265VAC	3.3V	7.5W	2270mA	74%	50°C	UL, CUL, CE, CB, FCC, UKCA
ASP07201	85-265VAC	5V	7.5W	2270mA	77%	70°C	UL, CUL, CE, CB, FCC, UKCA
ASP07202	85-265VAC	9V	7.5W	2270mA	80%	70°C	UL, CUL, CE, CB, FCC, UKCA
ASP07203	85-265VAC	12V	7.5W	2270mA	82%	70°C	UL, CUL, CE, CB, FCC, UKCA
ASP07204	85-265VAC	15V	7.5W	2270mA	82%	70°C	UL, CUL, CE, CB, FCC, UKCA
ASP07205	85-265VAC	18V	7.5W	2270mA	82%	70°C	UL, CUL, CE, CB, FCC, UKCA
ASP07206	85-265VAC	24V	7.5W	2270mA	82%	70°C	UL, CUL, CE, CB, FCC, UKCA

ASP07 Series 7Watt


ELECTRICAL PARAMETER

item	Conditions	min	typ	max	unit
Input voltage		85	---	265	Vac
		120	---	370	Vdc
Input frequency	Vin=85~265Vac	47	---	63	Hz
Input current	Full load, Vin=85~265Vac/120~370Vdc	---	0.3	---	A
Inrush current	Cold start, Vin=230Vac	---	---	20	A
Standby power	No load, rated output voltage	---	---	0.15	W
Output voltage accuracy	Rated input voltage, full load	---	±3	---	%
Line regulation	Vin from 85~265Vac or 120~370Vdc	---	±1	---	%
Load regulation	Vout from min. to max.	---	±1	---	%
Dynamic Response(Vout)	50%~100% load, 1A/us, 1Khz, 50% duty ratio	---	---	110	%
Turn-on delay time	Rated input voltage, full load, cold start	---	---	3	S
Turn-on rise time	Rated input voltage, full load	---	---	50	ms
Hold up time	Rated input voltage, full load	5	---	---	ms
Overshoot	Rated input voltage, full load	---	---	10	%
Undershoot	Rated input voltage, full load	---	---	10	%
Ripple	Refer to below note	---	200	---	mV P-P
Short circuit	In hiccup mode, it will recover automatically after fault condition is removed; No excessive heat, odor, or plastic deformation shall occur with no safety hazard				
Over temperature	130-150°C, shut off output voltage, it will recover automatically after the temperature turn to normal				
Over current	When output current exceeds the rated range, it will be protected automatically, and will recover automatically after fault condition is removed				
Ambient operating temperature	Startup at rated voltage	-20		/	°C
Operating relative humidity	Non condensing	10		90	%
Storage temperature	Humidity 5 ~ 95% RH	-40		+85	°C
MTBF	Full load, 220Vac input, 25°C ambient temperature	550			Khrs
Dimension(LxWxH)	41.0 x 35.0 x 21.5mm, pin length 4mm				
Weigh	58.2g				
Safety	Design refer to UL/CUL60950, UL/CUL62368, IEC/EN60950, IEC/EN61558-2-16, IEC/EN62368				
Withstand voltage	I/P-O/P: 4KVAC, 5mA, 3s				
EMI	Design refer to EN55032, EN55014, FCC part15, ClassB under 3dB margin				
EMS	Design refer to EN61000-3-2:2014, ClassA EN61000-3-3:2013 IEC61000-4-2:2008 Contact Discharge±4KV, Air Discharge±8KV IEC61000-4-3:2006+A1:2007+A2:2010 IEC61000-4-4:2012, ±1KV IEC61000-4-5:2014, ±1KV IEC61000-4-6:2013 IEC61000-4-11:2004				


ASP07 Series 7Watt

OVERALL DIMENSION

Bottom view

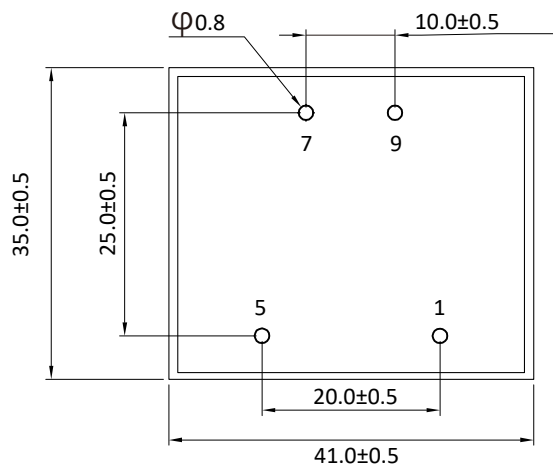

Side view

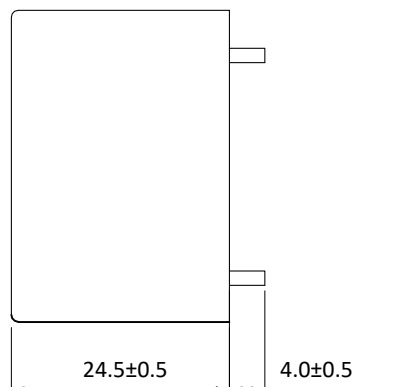


PIN DEFINITION


No	definition
1	AC(L)
5	AC(N)
7	Vout(+)
9	Vout(0V)

ELECTRICAL CURVE

Power Derating Curve

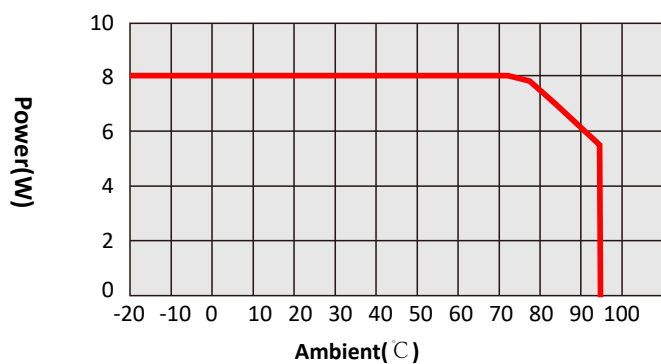

Power Derating Curve

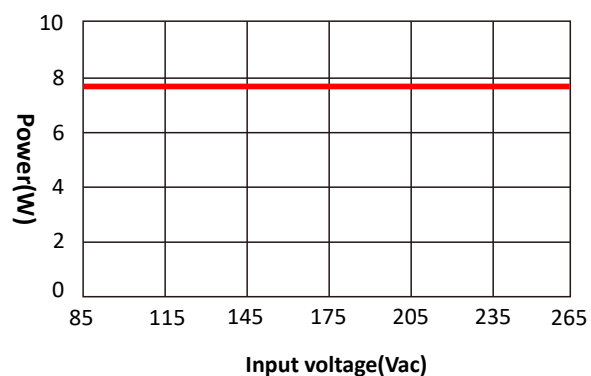

ASP07 Series 7Watt

APPLICATION GUIDE

1. Storage guide


Storage temperature: -40°C to $+85^{\circ}\text{C}$, storage humidity: 5% to 95%

2. Warranty Guide

In order to best ensure the reliability and life of the power supply, we recommend customers to use within 6 months. If the power supply is stored unused for more than 12 months, Then we recommend that the product needs to be aged for 2 hours before use.

3. Suitable for applications that require high EMC performance

This product is certified to EN55022 and EN55014 CLASS B EMC without any additional internal components. As follows
The circuit can meet the more stringent EMC performance requirements.

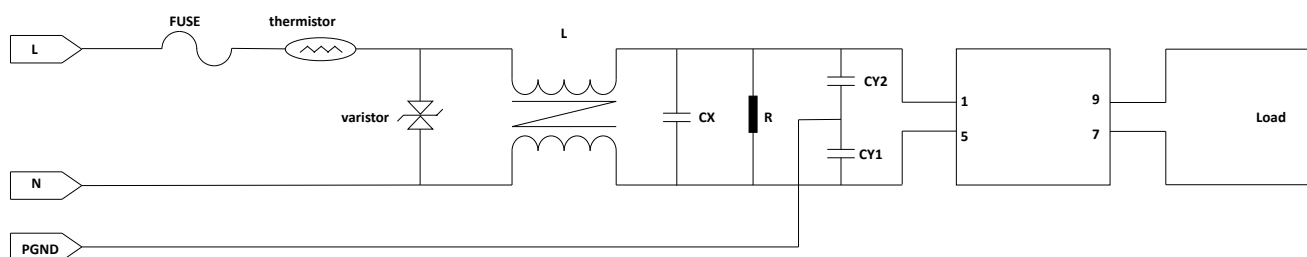

Fuse: Recommended parameters: 5A to 10A/250Vac, slow-acting fuse type

Thermistor: Recommended parameters: 2A, 5Ω , 1.8W to 5A D10, 2.5Ω , 2.4W.

Varistor: Recommended parameters: 14D471, 300Vac, maximum energy 118 joules.


L is common mode inductor: Recommended parameter: 10mH to 30mH

CX is an X2 capacitor: Recommended parameters: 0.1uF to 0.22uF/275Vac

R is a resistor: Suggested parameter: 1.0MQ to 3.0 MQ2.


4. Suitable for grounding:

The application does not support ASQ/ASP products



5. High surge circuit

The ASQ /ASP series tests and certificates surge levels to 1EC61000-4-5 and does not require any additional external components. To wave
When the surge level is increased to 6KV, the following external circuits may be recommended.

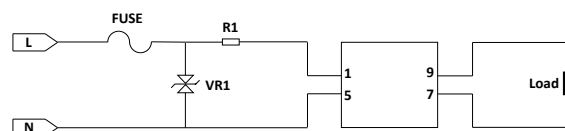

VR1 is a varistor, recommended parameters: 14D471, 300 Vac, maximum energy 118 joules.

R1 is a winding resistor, recommended parameters: 10R/1W~10R/3W, resistance wire diameter 0.1 to 0.23mm.

F1 is a fuse, recommended parameters: 6.3A to 10A/250 VAC, slow-acting fuse.