


AQR-15 Series, 15Watt

FEATURES:

- ✓ Universal AC input range
- ✓ Short circuit, and over current protections
- ✓ Board in-line type installation
- ✓ High voltage isolation
- ✓ Compact size
- ✓ Metal/Plastic case



Model	Input voltage (Vac)	Output voltage (Vdc)	Output current (mA)	Output power (W)
AQR15-5	85-265	5	3000	15
AQR15-12		12	1250	15
AQR15-15		15	1000	15
AQR15-24		24	625	15
AQR15-D5		±5	±1500	15
AQR15-D12		±12	±625	15
AQR15-D15		±15	±500	15
AQR15-D24		±24	±310	15

Note : Above models are default to plastic case, you may request for the models with metal case, plus "M" in the suffix.

ELECTRICAL

Input						
Parameters	Symbols	Test Conditions / Comment	Min.	Typ.	Max.	Units
Input voltage	V_{in}	--	85	--	265	Vac
Input frequency	F_{line}	--	47	--	63	Hz
Efficiency	η	Full voltage, full load	--	80	--	%
output						
Output voltage accuracy	--	$V_{in}=100-240Vac$	--	1	--	%
Line regulation	$V_{out-line}$	V_{in} from 100Vac to 240Vac	--	0.2	--	%
Load regulation	$V_{out-load}$	20%-100% load	--	0.5	--	%

AQR-15 Series, 15Watt
ELECTRICAL
output

Parameters	Symbols	Test Conditions / Comment	Min.	Typ.	Max.	Units
Ripple	V_{ripple}	--	--	120	--	mV
Turn-on delay time	--	--	--	1	--	S

Protection

Over current	Continuous Automatic Recovery					
Short circuit	Continuous Automatic Recovery					

Environment

Storage	$T_{storage}$	Humidity: 5% RH to 95% RH	-40	--	+105	°C
Ambient operating temperature	T_a	--	-25	--	+65	°C
Case temperature	T_c	--	--	--	+90	°C
Operating relative humidity	H_a	Non condensing	10	--	90	%
MTBF	T_{MTBF}	--	--	--	200	kHrs
Dimension(LxWxH)	62x45x22.5mm					
Weight	84g					


Safety

Isolation Voltage	Input-Output: 2500Vac \leq 1.5mA//1min					
	Input-Case: 1500Vac \leq 1.5mA//1min					
	output-Case: 500Vac \leq 1.5mA//1min					

Notes: Unless otherwise specified, all the above parameters are measured at ambient temperature of 25°C and V_{in} = 100Vac to 240Vac.

AQR-15 Series, 15Watt


MECHANICAL

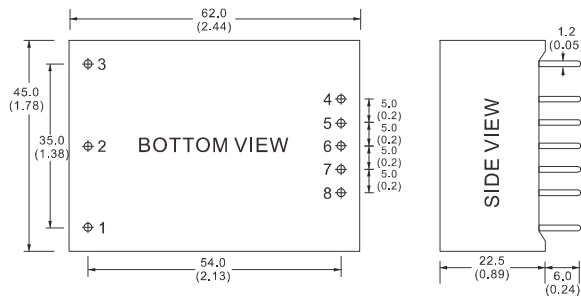

CONNECTION


PIN #	SINGLE	DUAL
1	FG	FG
2	AC(N)	AC(N)
3	AC(L)	AC(L)
4	+Vo	+Vo1
5	No Pin	No Pin
6	No Pin	COM
7	No Pin	No Pin
8	GND	-Vo2

LAYOUT

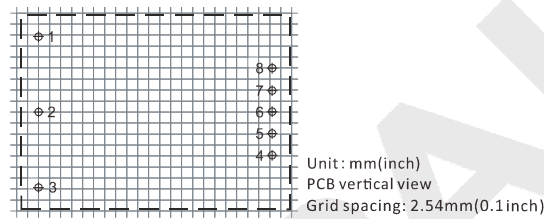

Note: Unit is mm(inch).


ELECTRICAL CURVE

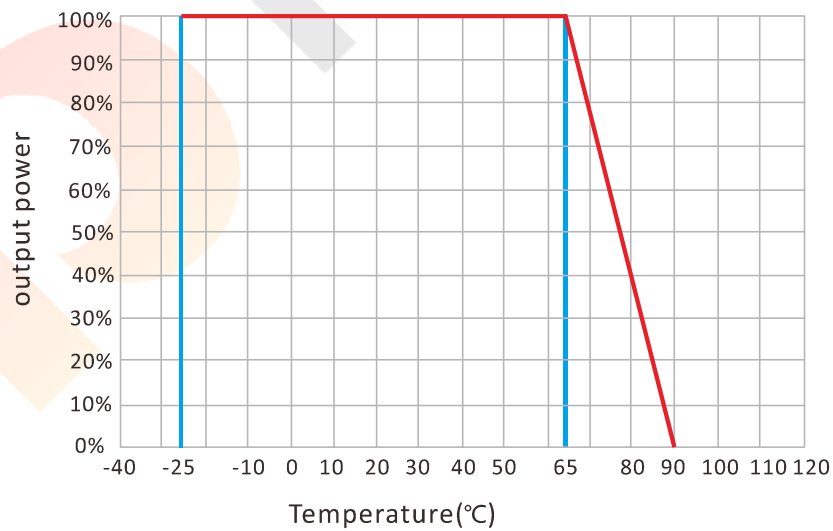

AQR-15 Series, 15Watt

NOTE

RECOMMENDED TEST AND APPLICATION CIRCUIT

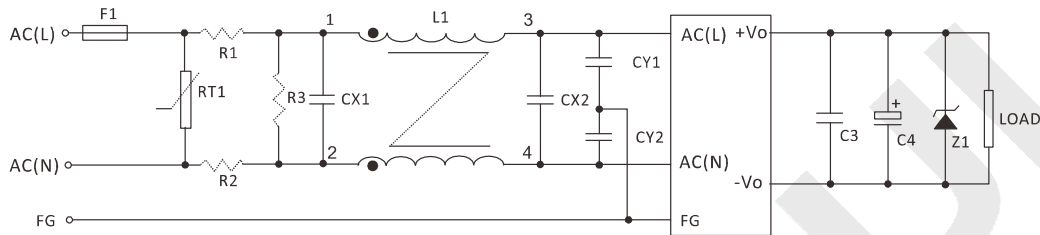

EMC RECOMMENDED APPLICATION CIRCUIT

	5VDC	12VDC	15VDC	24VDC
F1			T2A/250V	
RT1			7D471K	
R1, R2			2Ω/3W	
R3			1MΩ/2W	
L1			L=3-10mH, I=0.2-0.5A	
CX1, CX2			0.15-1μF/300Vac	
CY1, CY2			102K/400Vac	
C3			1μF/50V	
C4	470uF/16V	220uF/25V	220uF/25V	100uF/35V
Z1	P6KE6.8A	P6KE16A	P6KE20A	P6KE33A