

DNV-10 SERIES, 10WATT, 2:1 INPUT RANGE

FEATURES:

- ✓ 1500Vac isolation voltage
- ✓ Six-side shielded metal case with low ripple and noise
- ✓ Over voltage, over current, short circuit protection
- ✓ Operating temperature range -40°C to +85°C
- ✓ 3 year warranty



Model	Input voltage (Vdc)	Output voltage (Vdc)	Output current (mA)	Efficiency Typ.
DNV10-1211	12(9~18)	3.3	3000	85%
DNV10-1212		5.1	2000	87%
DNV10-1213		12.1	800	87%
DNV10-1214		15.1	700	89%
DNV10-1215		24.2	400	89%
DNV10-2411	24(18~36)	3.3	3000	87%
DNV10-2412		5.1	2000	88%
DNV10-2413		12.1	800	89%
DNV10-2414		15.1	700	90%
DNV10-2415		24.2	400	90%
DNV10-4811	48(36~72)	3.3	3000	87%
DNV10-4812		5.1	2000	89%
DNV10-4813		12.1	800	89%
DNV10-4814		15.1	700	90%
DNV10-4815		24.2	400	90%
DNV10-11012	110(66~160)	5.1	2000	89%
DNV10-11013		12.1	800	89%
DNV10-11014		15.1	700	90%
DNV10-11015		24.2	400	90%

Notes:

1. Other input and output models may available on request;
2. You may request for the models with heatsink, plus "R" in the suffix, e.g. DNV10-1211R.

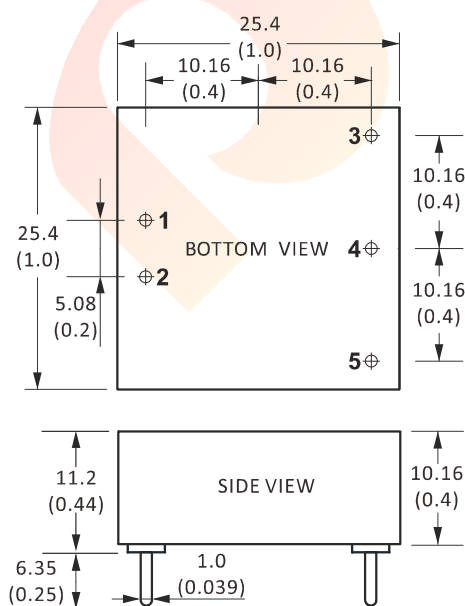
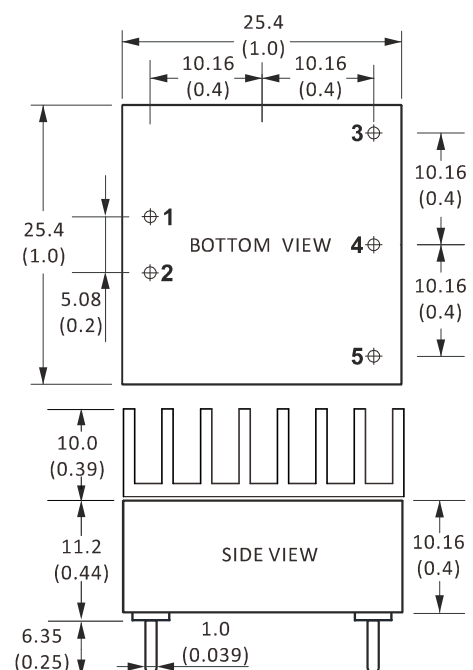
ELECTRICAL

Output voltage accuracy	---	≤1%
Line regulation	Nominal Load, full voltage	±0.2% max.
Load regulation	20% ~ 100% rated load	±0.5% max.
Dynamic response (transient/recovery time)	5%-50%-75% load capability	ΔVo/Δt: ±5.0%/500μs
Ripple and noise	20MHz BM, full load	1% Vout max.

DNV-10 SERIES, 10WATT, 2:1 INPUT RANGE
ELECTRICAL

Isolation voltage ($<2\text{mA/min}$)	Input to output	1500Vac
	Input to case	1000Vac
	Output to case	500Vac
Isolation resistance	500Vdc	20M Ω
Temperature coefficient	---	$\pm 0.02\%/^{\circ}\text{C}$ max.
Operating temperature range	---	-40°C to $+85^{\circ}\text{C}$
Storage temperature range	---	-45°C to $+120^{\circ}\text{C}$
Over current protection	---	Auto-recovery
Short circuit protection	---	Continuous auto-recovery
Over voltage protection	---	Auto-recovery
Relative humidity	---	10%-90% max.
Conducted emission	---	CLASS A
MTBF	Bellcore TR-332, 25°C	200KHrs
Weight	---	21g

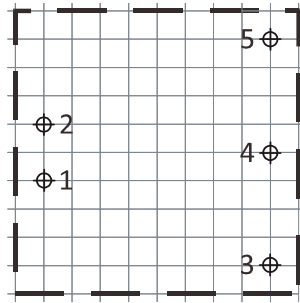
Notes: All the parameters are measured at 25°C ambient temperature, humidity $< 75\%$, nominal input voltage, full load and after warm-up, unless otherwise specified.

MECHANICAL
WITHOUT HEATSINK

WITH HEATSINK


DNV-10 SERIES, 10WATT, 2:1 INPUT RANGE

MECHANICAL

PCB LAYOUT



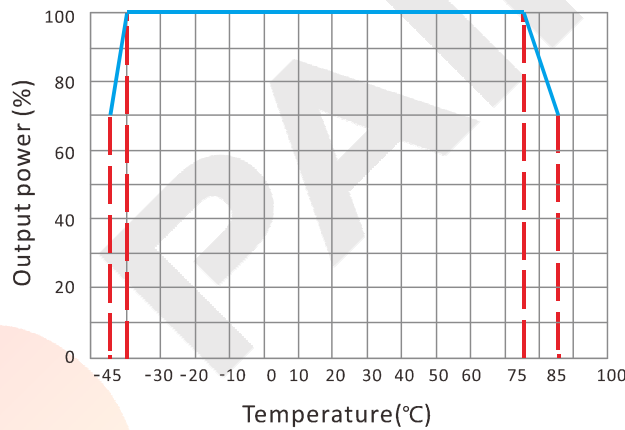
Unit : mm(inch)
PCB vertical view
Grid spacing: 2.54mm(0.1 inch)

CONNECTION

PIN #	SINGLE
1	+Vin
2	-Vin
3	+Vo
4	No Pin
5	GND

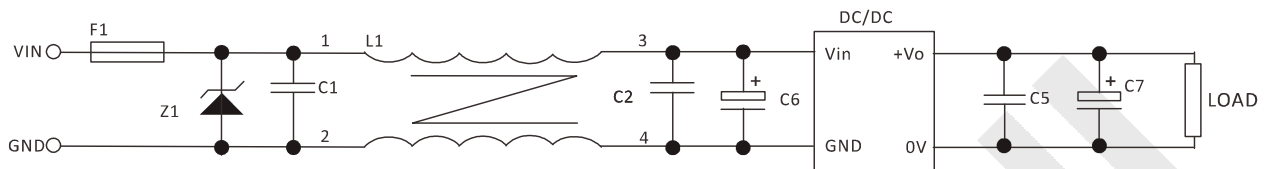
Note:
* Unit is mm(inch).

TEMPERATURE PROFILE



CAPACITIVE LOADS SELECTION

Vout: 3.3V 5V		Vout: 12V 5V		Vout: 24V	
Recommended value	MAX. value	Recommended value	MAX. value	Recommended value	MAX. value
10000µF	15000µF	1000µF	2200µF	470µF	1000µF

DNV-10 SERIES, 10WATT, 2:1 INPUT RANGE
NOTES
RECOMMENDED TEST AND APPLICATION CIRCUIT


1. TVS&FUSE will be helpful with over voltage protection and inrush limiting. Recommended FUSE should better be 1.5~2times of the rated current ;
2. The input filter capacitor C6 could select the aluminum electrolytic capacitors or tantalum capacitors, and the withstand voltage should be greater than the highest input voltage. Recommended capacitor should be between 22 μ F~100 μ F;
3. C1,C2 for the input filter capacitor, 0.1~1 μ F high-frequency ceramics capacitor or chip capacitor are recommended. The withstand voltage of output filter C5, C7 should be greater than the highest output voltage. Recommended capacitor of C7 should within 100 μ F and C5 connected with the chip to reduce the input voltage peak, recommended 0.1~1 μ F high-frequency ceramics capacitor or chip capacitor.