



Specifications

**Constant Current LED Power Supplies
Economical Series -PEBH, 3W**

PAIRUI ELECTRONICS

No. 545 Museum Road
Yangzhou, Jiangsu
China 225009

Tel: 86 (514) 8279 1592

Fax: 86 (514) 8769 3159

2020

LED Power Supplies for Indoor Use

PEBH SERIES, 3WATT, IP20 RATING

Features

- 3 Years Warranty
- High Input Voltage Range: 220~240Vac
- Constant Current Output Mode
- Waterproof Rating IP20
- Class II Power, no FG
- Short Circuit, Over Load, No-load, Over temperature Protections



Applications

- ✓ Panel Light
- ✓ Down Light
- ✓ Recessed Light
- ✓ Cabinet Light
- ✓ Other Indoor used Lights

Electrical

Part Number	Rated Power	Output current	Output voltage	Efficiency	Certificate
PEBH003C0120NSLPA1	3.1W	120mA	15-26V	72%	CE TUV SAA
PEBH003C0150NSLPA1	3.9W	150mA	15-26V	72%	CE TUV SAA
PEBH003C0200NSLPA1	3.2W	200mA	9-16V	72%	CE TUV SAA
PEBH003C0300NSLPA1	3.9W	300mA	5-13V	72%	CE TUV SAA
PEBH003C0350NSLPA1	3.5W	350mA	3-10V	72%	CE TUV SAA
PEBH003C0500NSLPA1	3W	500mA	3-6V	72%	CE TUV SAA
PEBH003C0550NSLPA1	3.3W	550mA	3-6V	72%	CE TUV SAA
PEBH003C0600NSLPA1	3.6W	600mA	3-6V	70%	CE TUV SAA
PEBH003C0700NSLPA1	4.2W	700mA	3-6V	70%	CE TUV SAA

NOTE: Other output models are may available on request.

INPUT

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Rated Input Voltage		220		240	VAC
Range Of Input Voltage		198		264	VAC
Frequency		50		60	Hz
Input Current	198VAC, full load			0.04	A
Input Power	230VAC, full load			6	W
Power factor(PF)	230VAC, full load	0.5			
No-Load Power Consumption				1	W
Inrush Current	230VAC, full load	≤25A/200us(230VAC, full load)			

OUTPUT

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Current Accuracy			±5		%
Max. Output Power				4.2	W
Started Delay Time	230VAC, full load			0.5	s
Current Ripple				±7	%

Protection

Short circuit	Auto Recovery
Over load	Auto Recovery
No-load	Auto Recovery
Insulation voltage	I/P to O/P,3KVac/1min
Insulation resistance	>100M ohm/500VDC
Leakage current	I/P to O/P <0.75mA

Environment

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Ta/Operation Temperature		-25		50	°C
Ts/Storage Temperature		-40		85	°C
Tc/Enclosure Temperature				90	°C
Humidity		10		90	%RH

Construction

Connection Method	Amphenol connector
Installation	Independent external
Output amphenol connector specification	CS200-00-350-02P-15-01AH/CS200-00-350-0 4P-15-00AH
Input amphenol connector specification	CS200-00-350-02P-1Y-108AH/CS200-00-350-04P-1Y-210
Dimension	95*35*25mm

Others

RoHS	Complied to 2011/65/EU
Life Time	30000h @45°C(Ta)/85°C(Tc)
Warranty	3years


Standards

Safety Standards	EN61347-1:2015, EN61347-2-13:2014/A1:2017, EN62493:2015, AS/NZS IEC61347.2.13:2013, AS/NZS 61347.1:2016, GB19510.1-2009
EMC Standards	EN55015:2013/A1:2015, EN61000-3-2:2014, EN61000-3-3:2013, EN61547:2009, GB/T17743.2017
Surge	L-N/0.5KV(2KV Optional)

Remark:

1. Unless otherwise specified, all specification parameters are measured at input voltage of 230VAC, rated load and ambient temperature of 25°C.
2. Power supply is considered as a component and used in combination with terminal equipment, because EMC is affected by the whole set of equipment, the manufacturer of terminal equipment needs to re-emc confirm the whole set of equipment.

Mechanical

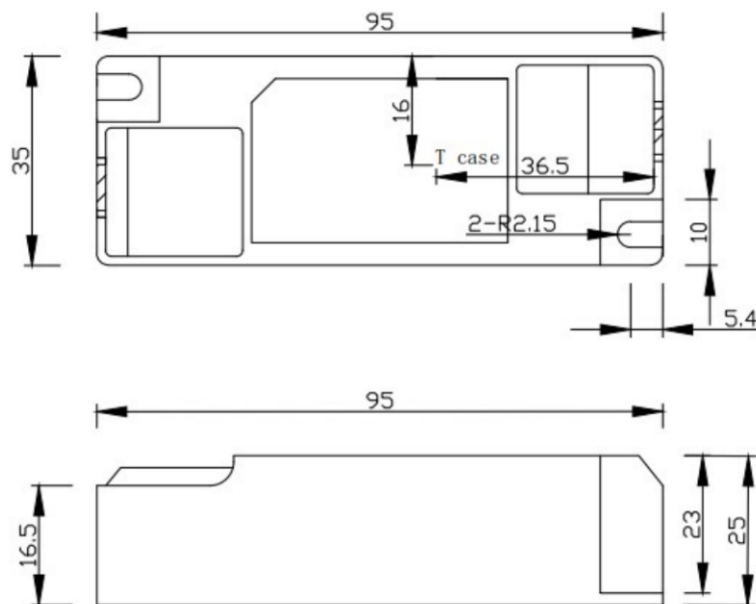

Packing information

Carton L*W*H(mm)	Pcs Carton	Net weight Pcs(kg)	Net weight Carton(kg)	Gross weight Carton(kg)
620*260*185	150	0.06	9	10.5

Electrical Curve

